

Liebert[®] NXC from 10 to 200 kVA





Emerson Network Power, a division of Emerson, is a global company that provides a unique combination of industry expertise, technology, and resources to make the future of your business possible.

As a trusted industry leader in smart infrastructure technologies, the company provides innovative data center infrastructure management solutions that bridge the gap between IT and facility management, delivering efficiency and uncompromised availability regardless of capacity demands.



The wide product portfolio and integration capabilities enhanced by complete life cycle services support data centers, communication networks, healthcare and industrial facilities from project launch to performance optimization.

Emerson Network Power's areas of established expertise include solutions and services for AC and DC power, thermal management systems, infrastructure management & monitoring, integrated racks and enclosures, power switching and controls.

With presence in over 150 countries backed by the local service and support of over 3,200 certified professionals, Emerson Network Power is uniquely positioned to provide comprehensive solutions wherever you are located.





Liebert® NXC From 10 to 200 kVA

Features and Performances


- Output power factor up to 1
- Double conversion efficiency up to 96%
- ECO mode efficiency up to 99%
- Input current total harmonic distortion correction (THDi) < 3%
- Battery charger up to 50 A
- Integrated manual bypass
- Integrated input and output breakers/switches (10-60 kVA)
- Integrated parallel load bus and synchronization port (LBS)

Continuous Reliability

The Liebert® NXC 10 - 200 kVA range offers reliable and flexible secure power in a fully integrated package solution. Its highly efficient transformer-free double conversion technology delivers installation and running cost savings. With a rated output power factor up to 1, Liebert® NXC is also able to provide greater active power than a traditionally rated 0.9 power factor UPS.

Liebert® NXC achieves up to 96% efficiency in double conversion mode and up to 99% in ECO mode, thus ensuring effective load protection, while reducing the total cost of ownership (TCO)

and environmental impact. Liebert® NXC's combination of performance features, impressive integrated autonomy and compact footprint make it ideal for guaranteeing clean, continuous power for a wide range of applications from IT and manufacturing to retail and transport. Its low THDi and active input power factor correction ensure that the current absorbed from the upstream distribution network is near equal to its nominal output current, hence eliminating the need for oversizing gensets and other equipment.

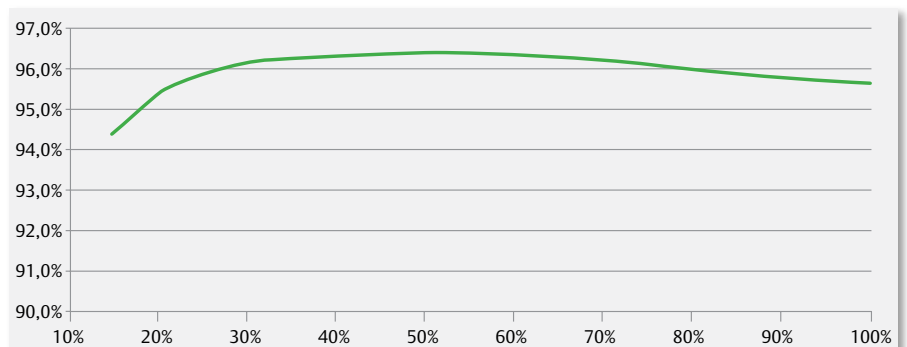

Liebert® NXC efficiency curve (80 - 200 kVA)



Flexibility

To ensure superior protection for critical loads, the Liebert® NXC range has been designed to optimize specific rating requirements, thus enhancing flexibility and installation space needs.

Liebert® NXC's flexibility is further enhanced through:

- **Single and three phase output configuration***
- **Integrated parallel and dual bus control**
- **Common or distributed battery bank**
- **Multiple internal battery configurations for flexible internal back up time management*.**

Output Configuration

Liebert® NXC models up to 20 kVA can be configured on-site to deliver three (3/3) or single (3/1) phase output giving it the flexibility to adapt to changes in installation environments.

**On selected configurations*

Full Galvanic Isolation


Liebert® NXC offers integrated full galvanic isolation, meaning that an isolation transformer may be housed inside the UPS cabinet. This greatly reduces the system footprint, thus providing space saving advantages. The transformer may be connected to the input or to the output of the UPS, providing:

- **Full galvanic isolation for medical and other critical applications**
- **Installation with two independent input sources (with different neutrals)**
- **Installation in distribution without neutral.**

Integrated Autonomy

Liebert® NXC provides an excellent integrated* autonomy which results in back up times of up to one hour. Its spacious internal architecture is able to house up to four battery strings, further optimizing integrated autonomy and delivering the added advantage of virtually eliminating the need for an external battery cabinet. This furthermore reduces installation costs and minimizes the demand on physical space.

In addition, Liebert® NXC's powerful battery charger ensures rapid recharge, increasing its ability to manage longer back up times.

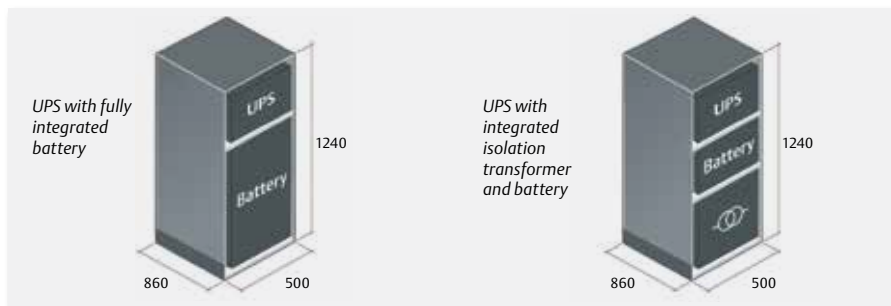

Liebert® NXC 10-20 kVA architecture



In The Field

Trellis™ Platform

Liebert® NXC can be integrated into Emerson Network Power's Trellis™ platform. A real-time infrastructure optimization platform that enables the unified management of data centre IT and facilities infrastructure.

The Trellis™ platform software can manage capacity, track inventory, plan changes, visualize configurations, analyze and calculate energy usage, and optimize cooling and power equipment as well as enable for virtualization.

The Trellis™ platform monitors the data center, providing a thorough understanding of system dependencies to help IT and facilities organizations keep the data center running at peak performance. This unified and complete solution, delivers the power to see the real situation in your data center, make the right decision and take action with confidence.




Parallel and Dual Bus Ready

Liebert® NXC can be connected with up to four units in parallel. A single unit can be upgraded to parallel operation via easy to modify software settings, allowing the system to be customized for the requested configuration.

The Loop BUS connection used in paralleling the system

delivers ultimate reliability and eliminates the possibility of a single point of failure, ensuring perfect load sharing and fast detection of any variation in the system status.

Furthermore, the output of two single or parallel Liebert® NXC units can be synchronized to deploy a dual bus feed, achieving Tier IV level reliability.

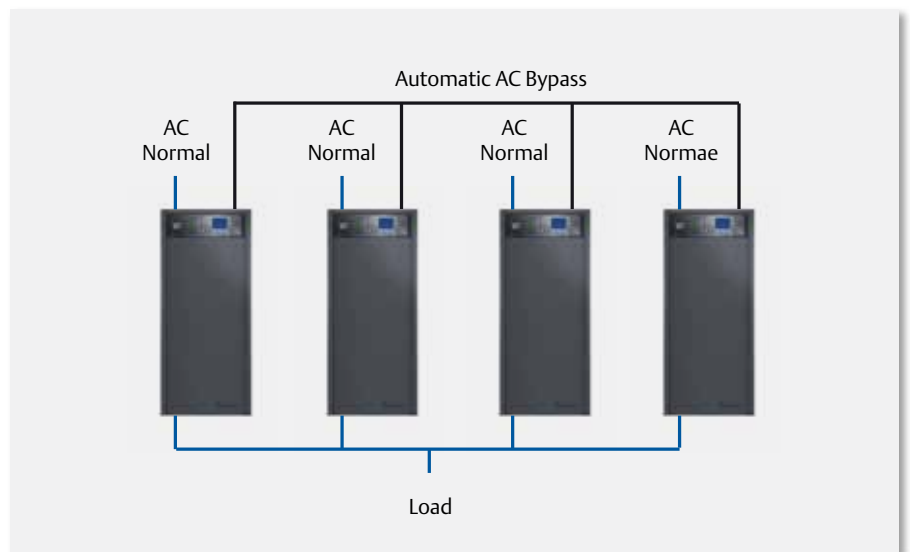

Liebert® NXC - Parallel configuration

Communication



Liebert® NXC features a multi-lingual LCD user interface allowing close control and monitoring of system status and performance. The UPS offers the following communication features:

- **Voltage-free contact ports**
- **USB interface**
- **Optocoupler based interfaces**
- **Intellislot for SNMP, Modbus or Relay communication.**

These communication capabilities make Liebert® NXC compatible with any building management system.



Liebert® NXC - 10 - 20 kVA

Liebert® NXC - 30 - 120 kVA

Liebert® NXC - 160 - 200 kVA

Software Connectivity

Liebert Multilink™ software prevents unexpected server shutdowns and minimizes downtime warning of pending power losses and initiating safe shutdown of operating systems if required.

Liebert Nform™ network communications system enables customers to leverage the distributed monitoring capabilities of network connected equipment, providing centralized management of distributed systems.

Serviceability

The architecture of the Liebert® NXC is designed to optimize installation and simplify service with its easily removable power assembly. This architecture considerably minimizes the time needed for repairs and optimizes serviceability.

Liebert® NXC also comes equipped with casters to facilitate ease of movement and relocation.



Connectivity cards



LIFE™ Remote Diagnostic and Preventive Monitoring Service

Emerson Network Power's service program is designed to ensure that your critical power protection system is maintained in an optimum state of readiness at all times.

The **LIFE** remote diagnostic and preventive monitoring service provides early warning of UPS conditions and out of tolerances. This allows effective proactive maintenance, fast incident response and remote trouble shooting, giving customers complete security and peace of mind.



With **LIFE** services you will benefit from:

Uptime Assurance

Constant monitoring of UPS parameters, thus maximizing the system's availability.

First Time Fix Rate

Pro-active monitoring and data measuring ensure that when our customer engineers are dispatched on-site, they arrive prepared for first time resolution.

Proactive Analysis

From **LIFE** service centers, our experts proactively analyze the data and trends of your equipment, to recommend actions to ensure their best performance.

Minimized Total Cost of Ownership of Your Equipment

The continuous monitoring of all relevant parameters in turn maximizes unit performance, reduces on-site maintenance and extends the life of your equipment.

Fast Incident Response

LIFE allows for immediate definition of the best course of action, as a result of the regular communication between your **Liebert® NXC** system and our **LIFE** service centers.

Reporting

You will receive a comprehensive report detailing the working order of your equipment and its operational performance.

Liebert® NXC

Specifications

| Technical Characteristics (3/3 and 3/1 configurations) | | | | | | | | | | | | | | |
|--|--|-------|-------|-------|---------------------------|-------|--|-------------------|--------------------|-------|-------------------|-------|-----------------|--|
| Ratings (kVA) | 10 | 15 | 20 | 30 | 40 | 60 | 80 | 100 | 120 | 160 | 200 | | | |
| Input | | | | | | | | | | | | | | |
| Nominal input voltage (V) | 380/400/415 | | | | | | | | | | | | | |
| Input voltage range without battery discharge (V) | 305 to 477 | | | | | | | | | | | | | |
| Nominal frequency (Hz) | 50/60 | | | | | | | | | | | | | |
| Input frequency range (Hz) | 40 to 70 | | | | | | | | | | | | | |
| Input power factor (kW/kVA) | 0.99 | | | | | | | | | | | | | |
| Current THD at full linear load (THDI%) | <5 | | | | | | <3 | | | | | | | |
| Bypass voltage tolerance (%) | selectable from +20 to -40 | | | | | | | | | | | | | |
| Bypass frequency tolerance (%) | ±20 (±10 selectable) | | | | | | | | | | | | | |
| Battery | | | | | | | | | | | | | | |
| Number battery cells per string | Max: 240; Min: 180 | | | | Max: 240; Min: 192 | | | | Max: 264; Min: 180 | | | | | |
| Voltage temperature compensation (mV/°C/Cell) | -3.0 (selectable 0 to -5.0 around 25°C or 20°C or inhibit) | | | | | | -3.0 (selectable from 0 to -5.0 around 25°C to 30°C, or inhibit) | | | | | | | |
| Battery charger max. power (kW) | 4.5 | | | 6 | | 7.5 | | 12 | | 18 | | 24 30 | | |
| Output | | | | | | | | | | | | | | |
| Nominal output voltage (V) | 380/400/415 (three-phase) or 220/230/240 (single-phase) | | | | 380/400/415 (three-phase) | | | | | | | | | |
| Nominal output frequency (Hz) | 50/60 | | | | | | | | | | | | | |
| Nominal active power (kW) | 9 | 13.5 | 18 | 27 | 36 | 54 | 80 | 100 | 120 | 160 | 200 | | | |
| THDv with 100% linear load (%) | 2 | | | | | | | | | | | | | |
| Inverter overload capacity | 105% for 60 min; 125% for 5 min; 150% for 1 min; >150% for 200ms | | | | | | 105% with continuous operation; 125% for 10 min; 150 for 1min; >150% for 200ms | | | | | | | |
| Double conversion efficiency | 100% | 94.4% | 94.5% | 94.2% | 94.7% | 94.4% | 95.3% | 95.7% | 95.7% | 95.6% | 95.5% | 95.3% | | |
| | 75% | 94.0% | 94.4% | 94.5% | 94.8% | 94.7% | 95.5% | 95.9% | 95.9% | 95.8% | 95.7% | 95.7% | | |
| | 50% | 93.5% | 94.0% | 94.4% | 94.6% | 94.8% | 94% | 95.9% | 95.8% | 95.9% | 95.8% | 95.8% | | |
| | 25% | 90.5% | 92.9% | 93.5% | 91.7% | 93.6% | 94% | 95.0% | 94.7% | 95.0% | 94.9% | 94.9% | | |
| ECO mode efficiency (%) | 98.0% | | | | | | 99.0% | | | | | | | |
| Dimensions and weight | | | | | | | | | | | | | | |
| Dimensions (W x D x H) mm | 500 x 860 x 1240 | | | | 600 x 850 x 1600 | | | 600 x 1000 x 1600 | | | 600 x 1000 x 2000 | | | |
| Weight (excluding battery) kg | 115/145 | | | | 210/245 | | 225/260 | | 385/435 | | 430/480 | | 475/525 520/570 | |
| Weight (including 32 batteries) kg | 215/245 | | | | 600/635 | | 615/650 | | N/A | | | | | |
| General | | | | | | | | | | | | | | |
| Noise at 1 m (dBA) | ≤56 | ≤56 | ≤58 | ≤56 | ≤58 | ≤58 | ≤59 | ≤60 | ≤60 | ≤61 | ≤62 | | | |
| Protection level IEC (60529) | IP20 | | | | | | | | | | | | | |
| General and safety requirements for UPS | EN/IEC/AS 62040-1 | | | | | | | | | | | | | |
| EMC requirements for UPS | EN/IEC/AS 62040-2 | | | | | | | | | | | | | |
| UPS classification according to CEI EN 6240-3 | VFI-SS-111 | | | | | | | | | | | | | |

Customer Experience Center

Emerson Network Power's state-of-the-art Customer Experience Center located in Castel Guelfo (Bologna - Italy), enables our customers to experience first-hand a wide variety of data center technologies, supported by constant consultation from R&D and engineering specialists.



Customers visiting the center will be able to witness pre-installation demonstrations, covering the technical performance, interoperability and efficiency of Emerson UPS systems under real field conditions. These processes can be experienced from the facility's control room, where real-time performance measurements and reporting will be available while providing full visibility of the demonstration area. The center can host simultaneous tests at full load of up to 4000 A.

The customer validation area specifically dedicated to UPS consists of four testing stations, each one providing up to 1.2 MVA of capacity. Testing includes individual modules, as well as complete power systems, with the added possibility of the customer's switchgear support systems being connected, thus guaranteeing smooth, rapid installation and commissioning of large power systems. Testing is also customized based on the complexity, size and number of UPS components in the configuration.

Our Customer Experience Center offers three validation experiences:

- **Demo** - carried out on new products to demonstrate UPS performance
- **Standard** - validation test showing UPS standard technical performances in compliance with UPS catalogue and IEC 62040-3 standards
- **Customized** - session tailored to validating customer's specific technical performance needs.

#CustomerExperienceCenter 



Ensuring The High Availability Of Mission-Critical Data And Applications.

About Emerson Network Power

Emerson Network Power, a business of Emerson (NYSE:EMR), is the world's leading provider of critical infrastructure technologies and life cycle services for information and communications technology systems. With an expansive portfolio of intelligent, rapidly deployable hardware and software solutions for power, thermal and infrastructure management, Emerson Network Power enables efficient, highly-available networks.

Learn more at www.EmersonNetworkPower.eu

While every precaution has been taken to ensure accuracy and completeness herein, Emerson assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications subject to change without notice.

MKA4L0UKNXC Rev. 4-06/2016

EmersonNetworkPower.eu

Locations

Emerson Network Power

Global Headquarters
1050 Dearborn Drive
P.O. Box 29186
Columbus, OH 43229, USA
Tel: +1 614 8880246

Emerson Network Power AC Power EMEA

Via Fornace, 30
40023 Castel Guelfo (BO) Italy
Tel: +39 0542 632 111
Fax: +39 0542 632 120
ACpower.Networkpower.Emea@Emerson.com

Emerson Network Power United Kingdom

George Curl Way
Southampton
SO18 2RY, UK
Tel: +44 (0)23 8061 0311
Fax: +44 (0)23 8061 0852

Globe Park
Fourth Avenue
Marlow Bucks
SL7 1YG
Tel: +44 1628 403200
Fax: +44 1628 403203
UK.Enquiries@Emerson.com

Follow us on Social Media



Emerson, Consider it Solved, LIFE, Liebert, Trellis, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. or one of its affiliated companies ©2016 Emerson Electric Co. All rights reserved.

EMERSON, CONSIDER IT SOLVED™